


NITRILE RUBBER SHEET

FEATURES

Nitrile is a very good general purpose rubber. This product is a superior product to Neoprene, and resistant to oils and petroleum based fluids. Nitrile is used on workshop benches and in floor protection where fuels and oils are used. Nitrile can be used for making seals and gaskets.

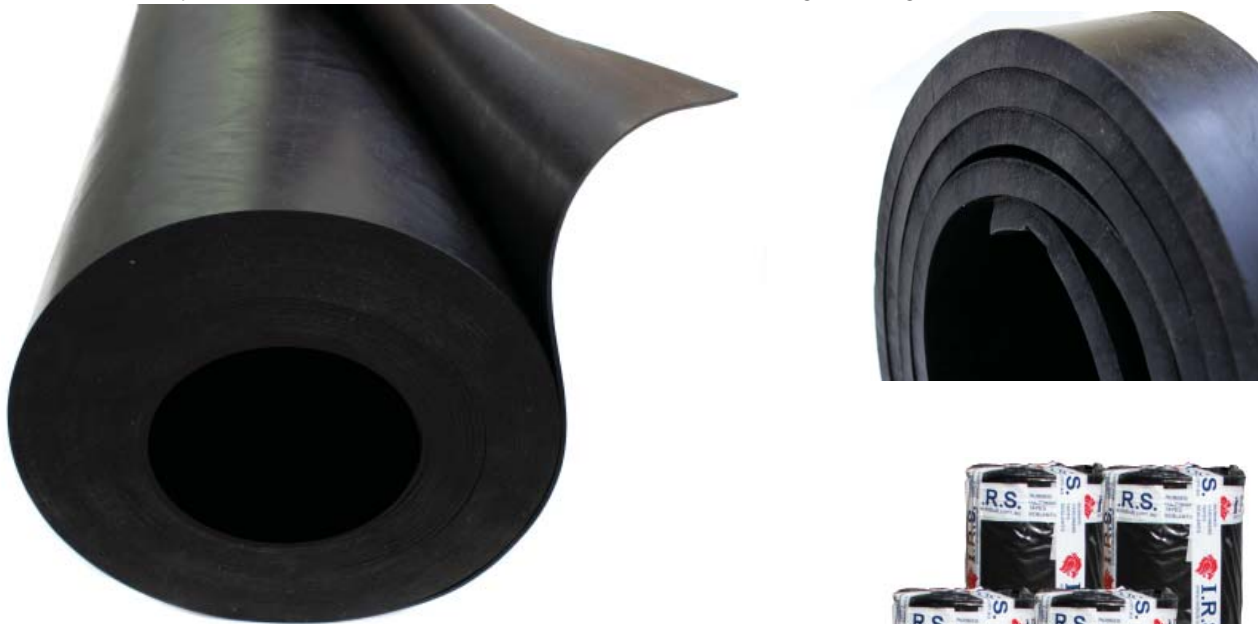

PROPERTIES		RESISTANCE	
Colour	Black	UV Rating	Poor
% Of Polymer	NBR 100%	Weathering	Poor
SG (Specific Gravity)	1.5	Tear Resistance	Fair
Tensile Strength (Mpa)	4.0	Abrasion Resistance	Good
Hardness (Shore A)	65 +/-5	Oil & Petroleum Products	Excellent
Elongation	250%	Vegetable Oil Resistance	Excellent
Temperature Range	-30 °C to 100 °C	Solvent Resistance (Aliphatic)	Excellent
		Acids	Good



Code	Description	Size (mm)	Colour	Type	Weight (kg) / LM
SRNIT1.5	Nitrile Rubber	1.5 x 1200	Black	100% NBR Polymer	2.30
SRNIT1.8	Nitrile Rubber	1.8 x 1200	Black	100% NBR Polymer	2.75
SRNIT3	Nitrile Rubber	3 x 1200	Black	100% NBR Polymer	4.70
SRNIT4.5	Nitrile Rubber	4.5 x 1200	Black	100% NBR Polymer	7.00
SRNIT6	Nitrile Rubber	6 x 1200	Black	100% NBR Polymer	9.40
SRNIT9.5	Nitrile Rubber	9.5 x 1200	Black	100% NBR Polymer	14.0

FOR ENQUIRIES:

Call us on: 1300 767 567

Western Australia Store: 102 Briggs Street Welshpool WA 6106

Queensland Store: 2/17 Alexandra Place Murarrie QLD 4172

Email: websales@indrub.com.au

Web: www.indrub.com.au



I.R.S.

**RUBBER
HARDWARE
TAPES
SEALANTS**