



Butt Hinge, Spring loaded, Stainless Steel 304

AS-AS-0840

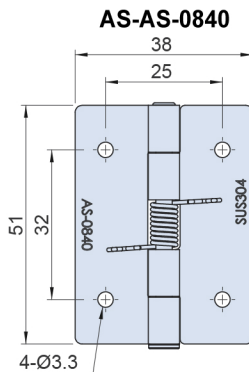


NSCL253-6SS

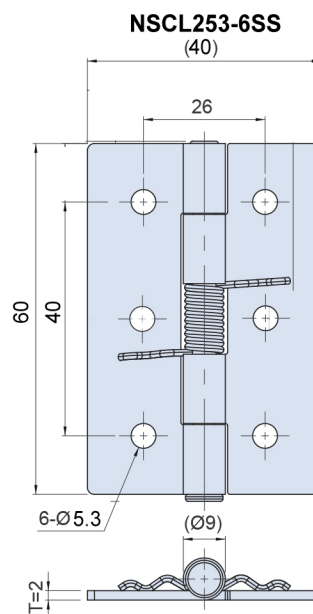



AS-AS-0860



AS-AS-0860

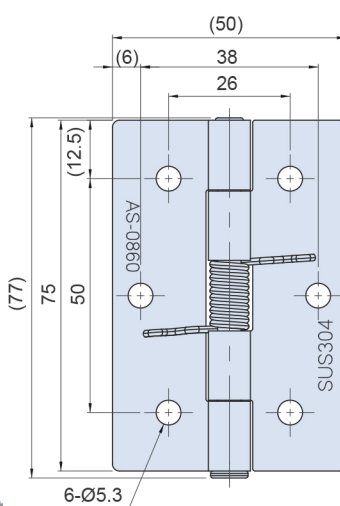

AS-AS-0870

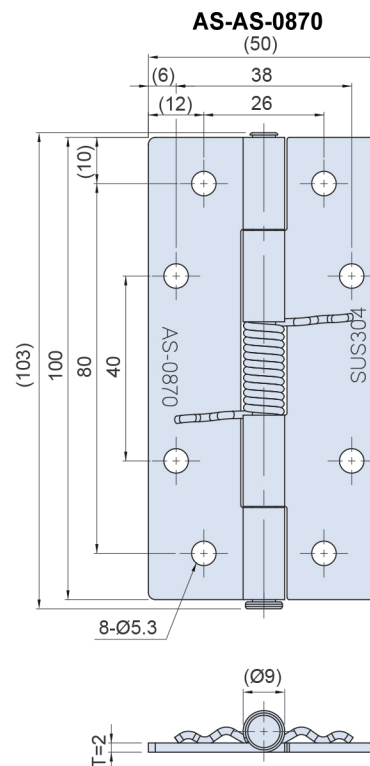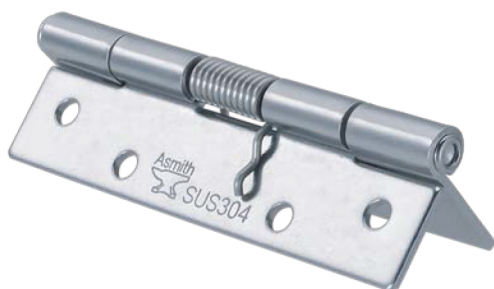

Item Code	Fixing Hole #	Style Type	Material	Finish	Dimensions (mm)				Load Capacity (kgf / 2 pcs)	Product Weight (g each)
					L	W	T	°		
AS-AS-0840	6 @ M3.3	Left & Right Opening	304SS	Vibration Ground	51	38	1.5	88°	8kgf	30
NSCL253-6SS	6 @ M6.4	Left & Right Opening	304SS	Vibration Ground	60	40	1.5	88°	9kgf	35
AS-AS-0860	6 @ M5.3	Left & Right Opening	304SS	Vibration Ground	77	50	2	87°	16kgf	85
AS-AS-0870	8 @ M5.3	Left & Right Opening	304SS	Vibration Ground	103	50	2	87°	24kgf	115

Manufactured in accordance with RoHS.



I.R.S.
Build With Quality

RUBBER
HARDWARE
TAPES
SEALANTS

1300 767 567

www.indrub.com.au