


LOCKS & HANDLES

ANODISED BRUSH-FINISH ALUMINUM HANDLE

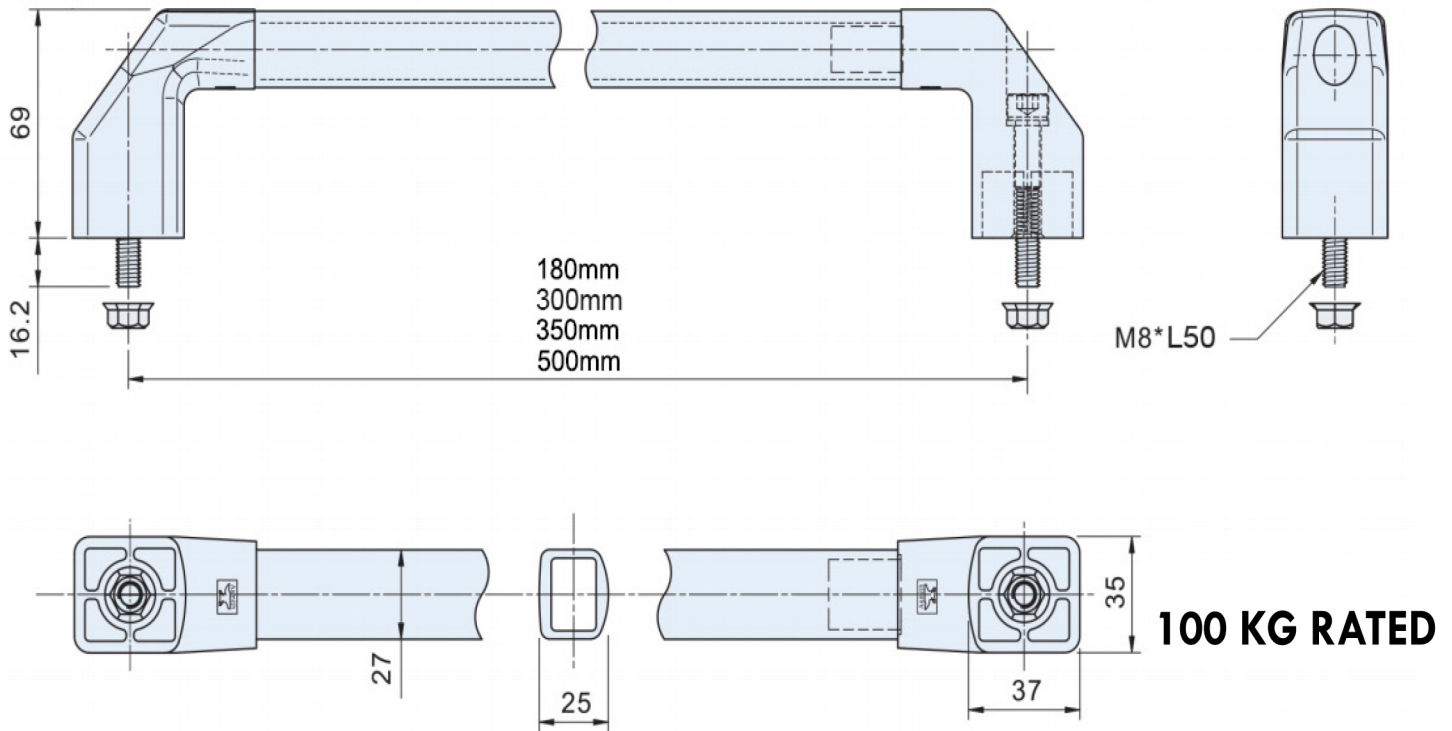

Features

- Resistance to acid, alkali, greasiness.
- Holder attach M8*L50 screw, the outlook is artistic.
- Weathering resistance of PA holder is -20°C - +150°C.
- Could be quick installed on the panel with a tapped hole or with a normal hole by nut.
- Tighten the screw from outside, working space is not effected by the cabinet inner space.



Material and Finish

- Holder: Polyamide (PA6-GF33), Black.
- Handle: Aluminium alloy (6063), Anodized in natural or black colour.

PART NO.	DESCRIPTION	LENGTH (MM)
AS-E-69180AL	Handle 180mm aluminium, 100kg load, weathering resistant -20°C - +150°C.	180
AS-E-69300AL	Handle 300mm aluminium, 100kg load, weathering resistant -20°C - +150°C.	300
AS-E-69350AL	Handle 350mm aluminium, 100kg load, weathering resistant -20°C - +150°C.	350
AS-E-69500AL	Handle 500mm aluminium, 100kg load, weathering resistant -20°C - +150°C.	500



I.R.S.
Build With Quality

RUBBER
HARDWARE
TAPES
SEALANTS

1300 767 567

www.indrub.com.au