

Gas Struts 10mm dia.



- Door weight (X)
- Door length (Y)
- Distance between the door hinging and the gas springs fixing point onto the door (Z)
- Number of gas springs (N)
- Gas spring thrust pressure (S)

The Formula to be applied to this calculation of (S):

$$S = \frac{X \times Y}{2 N \times Z} + 5 \text{ Kg}$$


(+5 Kg. = constant added weight for the frictions)

Example:

- Door weight (X) – 40kg
- Door length (Y) – 1.5m
- Distance (Z) – 0.23
- Number of gas springs (N) – 2

$$S = \frac{40 \times 1,5}{(2 \times 2) \times 0,23} + 5 \text{ Kg} = 70.200 \text{ kg./P}$$

Therefore two 70kg gas springs have to be fitted.

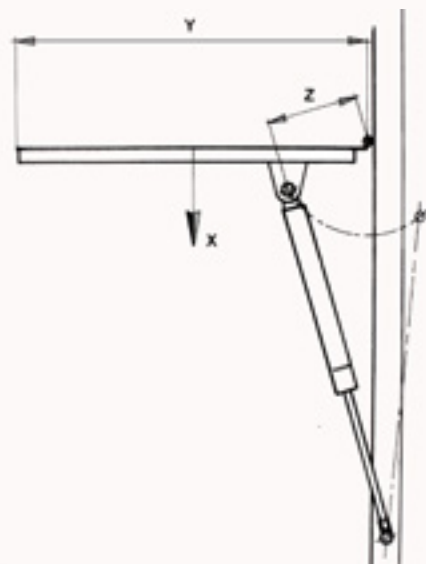

Code	Description	Pressure	FEATURES
GSK50N-830-10-BK to GSK1100N-830-10-BK	GAS STRUT 10MM DIA. SHAFT X 22MM DIA. TUBE	50 - 1100N	<ul style="list-style-type: none"> • Lengths: 525, 716, 816, 830 • Nitrile shaft • Non corrosive components • Made to European standard • Custom labels if required • Metal ends standards

FOR ENQUIRIES:

Call us on: 1300 767 567

WA Store: 102 Briggs Street Welshpool WA 6106

QLD Store: 2/17 Alexandra Place Murarrie QLD 4172

Email: websales@indrub.com.au

Web: www.indrub.com.au



I.R.S.

**RUBBER
HARDWARE
TAPES
SEALANTS**