

LOCKS & HANDLES

C80

ALUMINIUM HANDLE - SAFETY YELLOW




Features

- Colour: Safety yellow
- Resistance to acid, alkali, greasiness.
- Holder attach M8*L50 screw, the outlook is artistic.
- Weathering resistance of PA holder is -20°C - +150°C.
- Could be quick installed on the panel with a tapped hole or with a normal hole by nut.
- Tighten the screw from outside, working space is not effected by the cabinet inner space.

Material and Finish

- Holder: Polyamide (PA6-GF33), Black.
 - Handle: Aluminium alloy (6063), Anodized in natural or black colour.
- Safety yellow

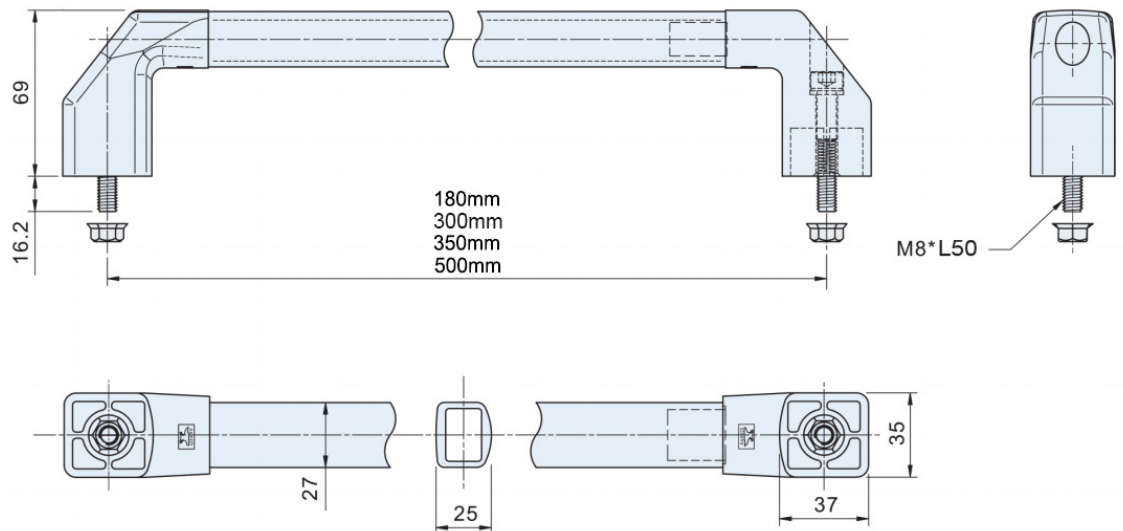

PART NO.	DESCRIPTION	LENGTH (MM)
AS-YE-E69180-1235C	Handle 180mm aluminium safety yellow UV stable, 100kg load, workable temperature -20°C - +150°C.	180
AS-YE-E69300-1235C	Handle 300mm aluminium safety yellow UV stable, 100kg load, workable temperature -20°C - +150°C.	300
AS-YE-E69350-1235C	Handle 350mm aluminium safety yellow UV stable, 100kg load, workable temperature -20°C - +150°C.	350
AS-YE-E69500-1235C	Handle 500mm aluminium safety yellow UV stable, 100kg load, workable temperature -20°C - +150°C.	500



I.R.S.

1300 767 567

**RUBBER
HARDWARE
TAPES
SEALANTS**

Email: websales@indrub.com.au

www.indrub.com.au