


Anti-Vibration Mounts

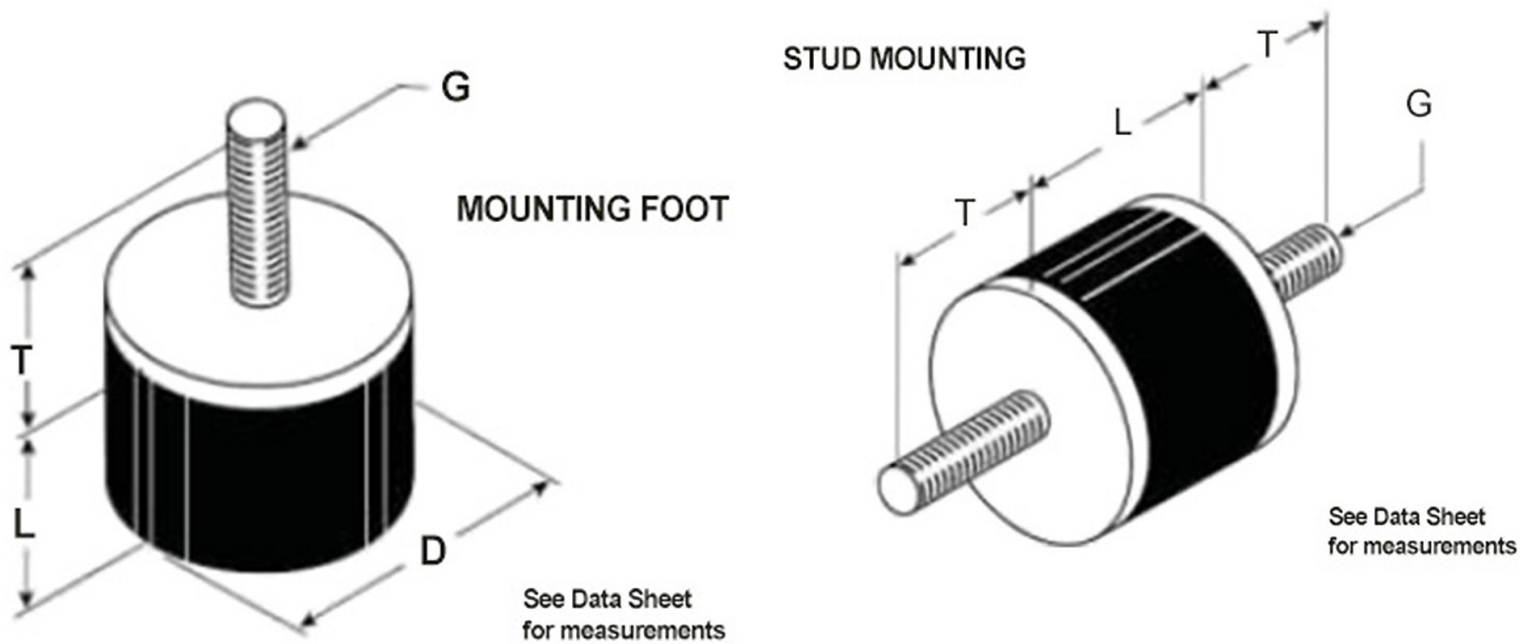

Stud Mounting - Type SM

Type	Maximum Loads		Defl * MM	L MM	D MM	T MM	G Dia	Colour Dot
	Axial KG	Shear KG						
Stud Mounting								
RMSMM-1	25	5	2.5	19	25	19	M6	-
RMSMW-2	25	7	5	25	25	19	1/16" WHIT.	-
RMSMW40-110	110	20	4	25	40	23	3/8" WHIT.	-
RMFM63-100	100	N/A	3	50+	63	37	M12	-
RMFM75-1000	1000	N/A	6	36	75	43	M12	-
Mounting Foot								
RMFM25A	25	N/A	2.5	20	25	13	M6	-

* Deflection applies to both axial and shear loads

+L = 50 is minimum free height over adjusting nuts (supplied)

FOR ENQUIRIES:

Call us on: 1300 767 567

Email: websales@indrub.com.au

Web: www.indrub.com.au



I.R.S.

**RUBBER
HARDWARE
TAPES
SEALANTS**