


NEOPRENE SHEET

FEATURES

Neoprene is a good general purpose material. This product is superior to Natural Rubber. Neoprene is generally attacked by strong oxidizing acid, ketene, chlorinated, aromatic and nitro hydrocarbons.

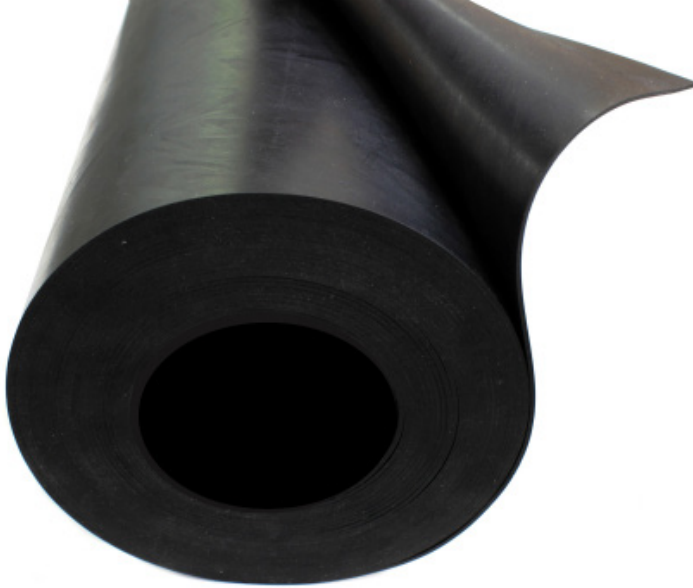

PROPERTIES		RESISTANCE	
Colour	Black	Tear Resistance	Very Good
% Of Polymer	CR 100%		
SG (Specific Gravity)	1.5	Flammability	Self-extinguish in 2 seconds
Tensile Strength (Mpa)	4.0		
Hardness (Shore A)	65 +/-5	Oil & Petroleum Products	Fair to Good
Elongation	250%	Oxidisation Resistance	Excellent
Temperature Range	-30 ° C to 90 ° C	Acids	Poor
		Acids (Diluted)	Fair

Code	Description	Size (mm)	Colour	Type	Weight (kg) / LM
SRNEO1.5	Neoprene	1.5 x 1200	Black	Premium Neoprene Polymer (CR)	2.30
SRNEO1.8	Neoprene	1.8 x 1200	Black	Premium Neoprene Polymer (CR)	2.75
SRNEO3	Neoprene	3 x 1200	Black	Premium Neoprene Polymer (CR)	4.70
SRNEO4.5	Neoprene	4.5 x 1200	Black	Premium Neoprene Polymer (CR)	7.00
SRNEO6	Neoprene	6 x 1200	Black	Premium Neoprene Polymer (CR)	9.40
SRNEO9.5	Neoprene	9.5 x 1200	Black	Premium Neoprene Polymer (CR)	14.0

FOR ENQUIRIES:

Call us on: 1300 767 567

Western Australia Store: 148 Welshpool Road, Welshpool WA 6106

Queensland Store: 1/9 Graystone Street Tingalpa QLD 4173

Email: websales@indrub.com.au

Web: www.indrub.com.au



I.R.S.

**RUBBER
HARDWARE
TAPES
SEALANTS**