
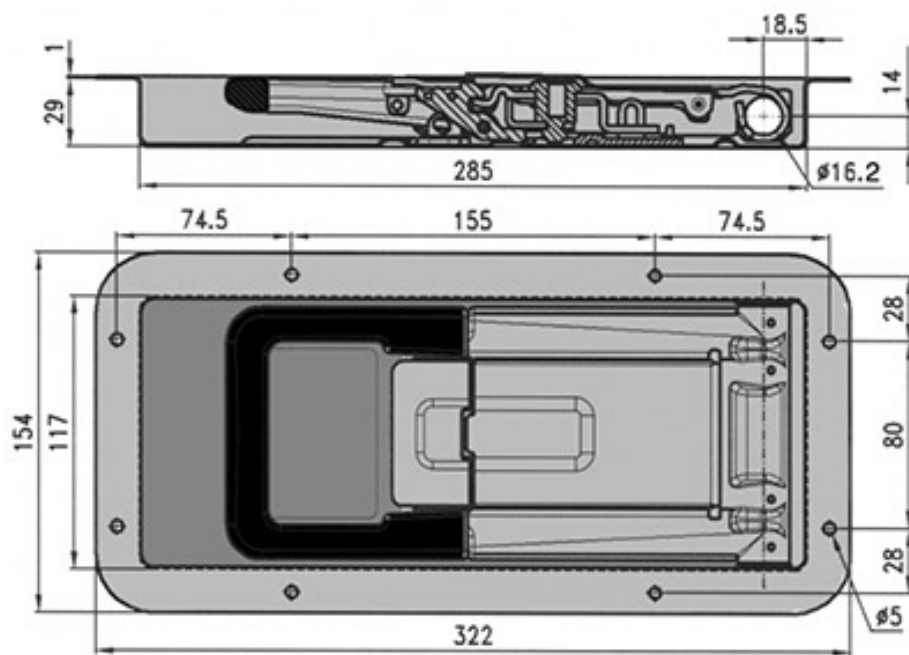
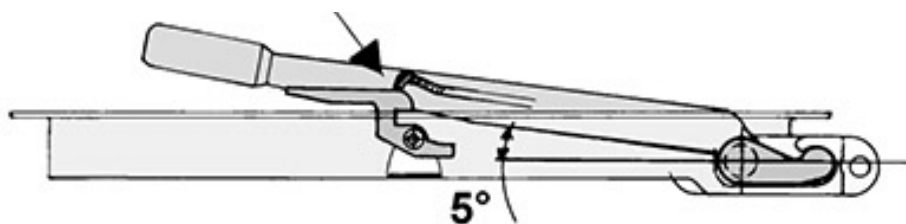


# LOCKS & HANDLES

## STAINLESS STEEL RECESSED HANDLE 16MM

C59

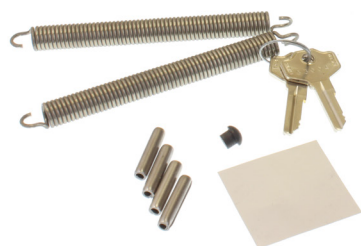

### PART NO.

PL0714-25952

### DESCRIPTION

Recessed handle for isothermal doors. Bar diameter 16 mm. Designed to open from inside with device art. 0714 25952. When mounting the bar, we suggest misaligning the cams with the four spiral pins, making a hole with a Ø 5 bit, then opening the handle and welding the bar inside the slot. By misaligning we mean pulling aside the handle with respect to the cam. To obtain a 5° angle, proceed as follows: with the cam closed the handle coupling should be above the pushbutton.



**I.R.S.**  
Build With Quality

RUBBER  
HARDWARE  
TAPES  
SEALANTS

1300 767 567

[www.indrub.com.au](http://www.indrub.com.au)