



I.R.S.
Build With Quality


RUBBER
HARDWARE
TAPES
SEALANTS

1300 767 567

www.indrub.com.au

Tonneau is a versatile fabric which is suitable for a wide range of end uses. The Emboss surface features a matte acrylic lacquer coating to both sides, delivering improved UV resistance and easy cleaning, with restricted plasticiser migration. It also has high levels of scratch and UV resistance, making it more suitable for longer-life applications.

PVC Spread Coated Polyester Fabric			
Weight	700 gsm		
Roll Width	210cm		
Roll Length	30 metres		
SPECIFICATIONS			
PROPERTIES	TEST METHOD	RESULT	UNIT
Yarn (W/F)	DIN EN ISO 2060	1300 / 1300	Denier
		1430 / 1430	Dtex
Threads (W/F)	DIN EN ISO 1049-2	20 / 20	Per inch
		8 / 8	Per cm
Tensile Strength (W/F)	DIN 53354	360 / 320.0	Kg / 5cm
		3528 / 3136	N / 5cm
		402 / 358	Lbs / inch
Tear Resistance (W/F)	DIN 53363	55.0 / 50.0	Kg
		539 / 490	N
		121 / 110	Lbs
Welding Adhesion	DIN 53357	11.2	Kg / 5cm
		109.8	N / 5cm
		12.5	Lbs / inch
Temperature Resistance	DIN 53361	-30 ~ +70	°C
Additives	UV, Anti Crack to -30°, Anti-Static, FR treatment to AS 2755.2, Matte lacquer both sides		
Environmental	Meets ROHS, REACH & VCA requirements		
Surface	Matte		

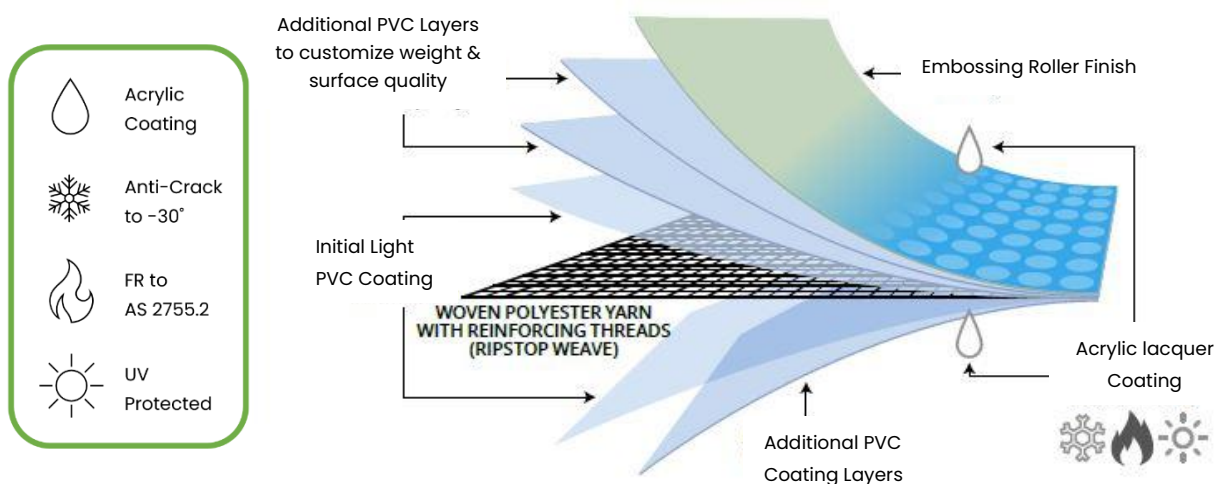

Warranty

A 7-year limited warranty on colour fading, cracking (polymer breakdown) and delamination is offered.