


# Rotary Ventilator




Code : BHRV225BK



Section AA

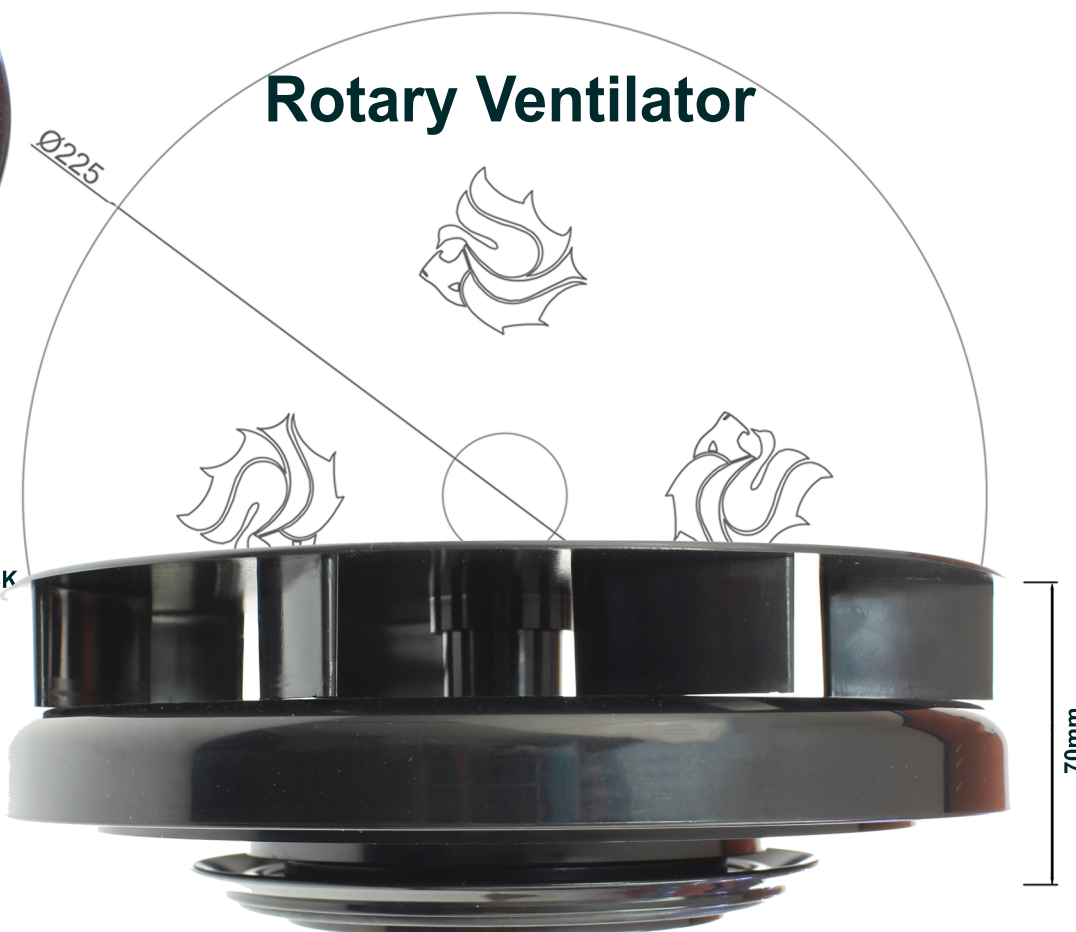

70mm

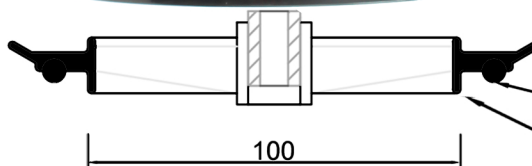

Soft Seal EPDM UV stable O'-Ring

100mm cut out

100

- BENEFITS :**
- # Low profile - 70mm high off sub-straight
  - # UV Stable ABS construction
  - # Stainless Steel 304 components
  - # Stainless Steel 304 fixing bolts
  - # Only 1 Fixing bolt required
  - # Large 100mm cut-out for Max-airflow
  - # EPDM UV Stable Soft seal O-Ring
  - # O-Ring able to take up uneven surfaces


**Installation :**

1. Cut a 100mm diameter hole in substrate.
2. Smooth down any loose or sharp edges and prime to prevent corrosion.
3. place the Rotary Vent into the hole making surer the EPDM UV stable O'-Ring is making full contact with the substrate. (adhesive sealant can be applied behind the O-Ring to help prevent moisture egress)
4. Working inside select M8 20mm for thickness 1mm - 11mm & M8 30mm for thickness 12mm - 20mm.
5. Working inside place the bolt through the inner rose vent and screw into the rotary vet stainless steel threaded housing.
6. Once bolted in-place clip the rose vent cover over the inner cover and adjust opening to your requirement .



Showing the Rose-vent open

Ø120

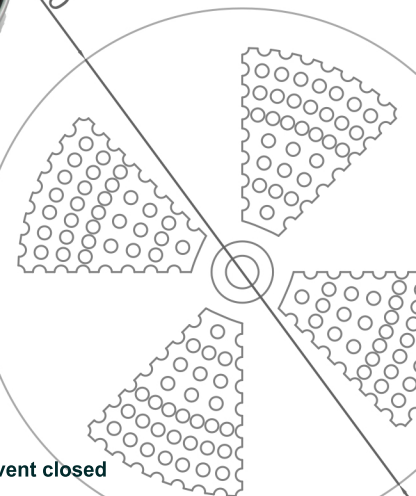

Showing the Rose-vent closed



**Low Profile Van, Bus, Caravan, Trailers, Motor homes, 4X4 Canopies**



**I.R.S.**

Build With Quality

RUBBER  
HARDWARE  
TAPES  
SEALANTS

1300 767 567

www.indrub.com.au