

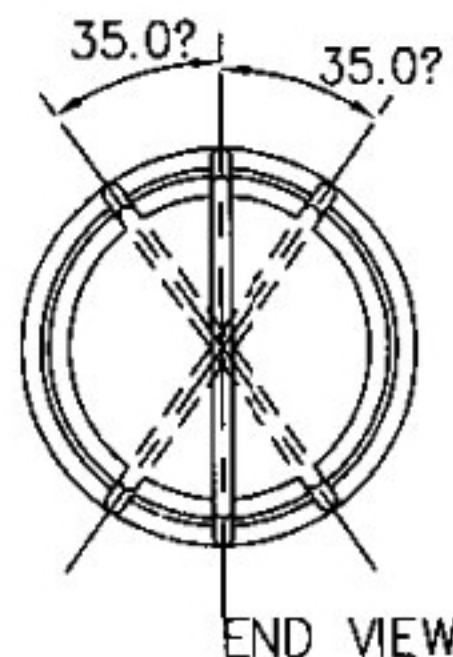


ALLOWABLE TWIST
BETWEEN ENDS

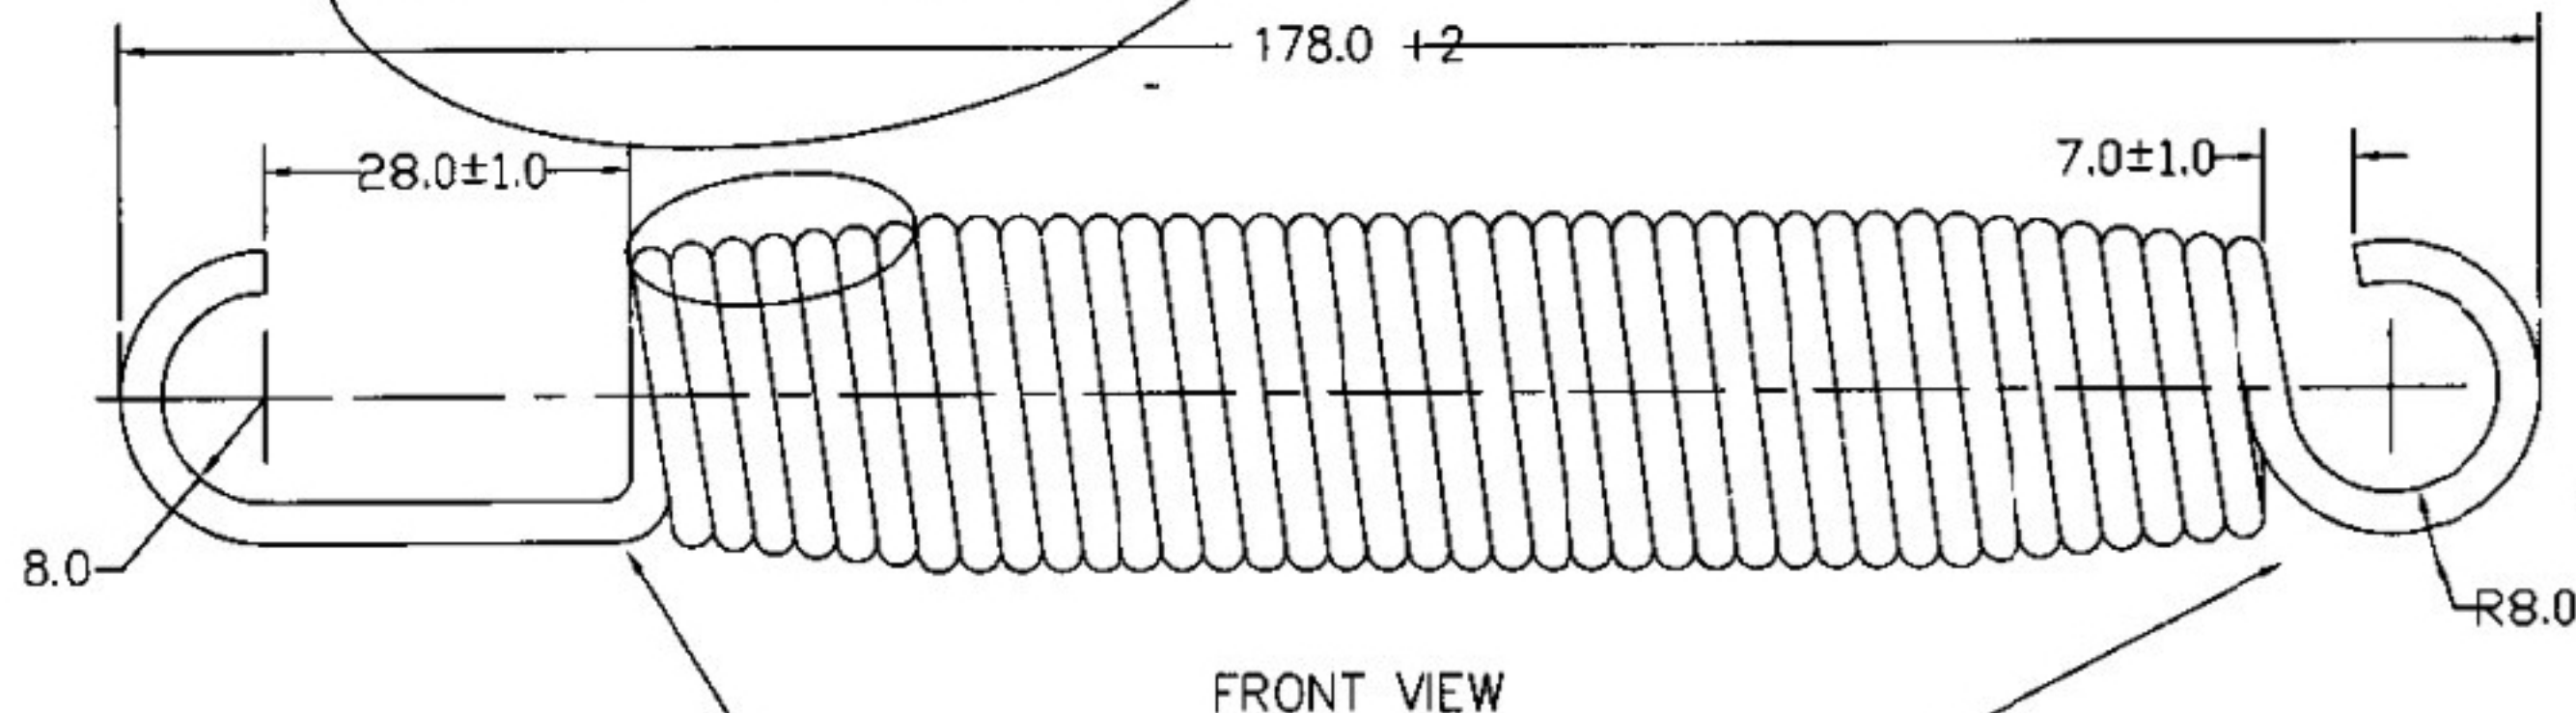

EXPLODED VIEW OF TAPER

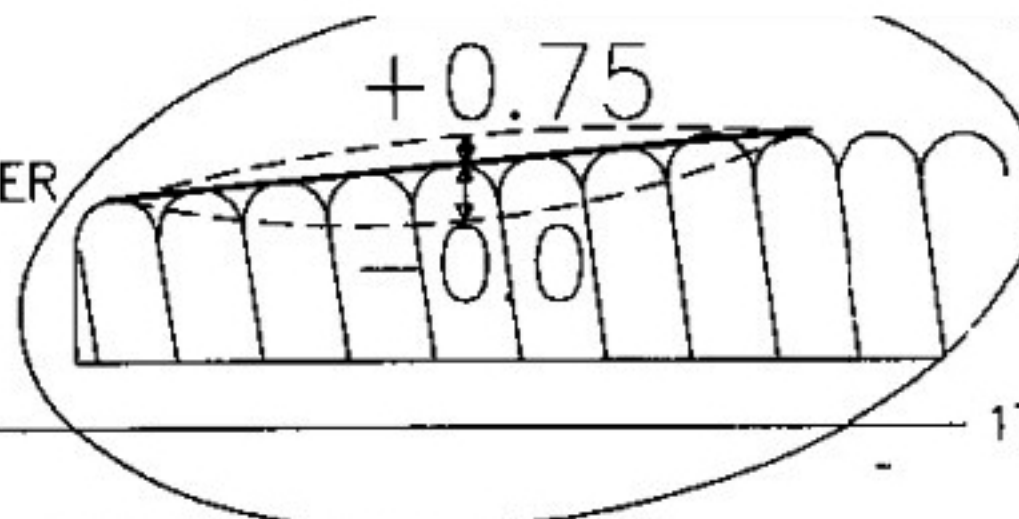

PROPERTIES: -

- 22.3 \pm 0.25 O.D. INCREASING OVER
8 COILS TO 27.0 \pm 0.25 mm O.D.

- 37 ACTIVE COILS R.H. WOUND

- WITH AN EXTENSION OF 10mm (B.H.T)
= 14 kg \pm 1 kg

- WITH AN EXTENSION OF 10mm (A.H.T)
= 11 kg \pm 1 kg

NOTE: SMOOTH RADII NO NOTCHING

