


SHEET RUBBER

Conveyor Rubber EP200

A2

Conveyor Rubber
EP 200/2-2.5 + 1.5
NR SBR - Natural Rubber
Styrene-butadiene

Technical Date Sheet		Date : 2019.10.15	
BELT DESCRIPTION: Conveyor belt EP200/2, 2+2, C/E			
TEST ITEM		UNIT	SPECIFICATION
1. DIMENSION			
WIDTH		mm	670
TOP COVER THICKNESS		mm	2
BOTTOM COVER THICKNESS		mm	2
TOTAL THICKNESS		mm	6
SPOOL LENGTH		m	100
2. CARCASS			
MATERIAL	WARP	-	Polyester
	WEFT	-	Polyamide
TENSILE STRENGTH		N/mm	≥ 200
ELONGATION AT 10 % LOAD (WARP DIRECTION)		%	≤ 4
NO. OF PLYS		-	2
3. COVER RUBBER			
COVER GRADE		-	
BEFORE AGING	TENSILE STRENGTH	MPa	≥ 5
	ELONGATION	%	≥ 350
AFTER AGING	CHANGE OF TENSILE STRENGTH	%	≤ 25
	CHANGE OF ELONGATION	%	≤ 25
ABRASION LOSS		mm ³	≤ 300
4. ADHESION			
COVER RUBBER AND CARCASS		N/mm	≥ 5.0
CARCASS AND CARCASS		N/mm	≥ 4.5
5. WEIGHT			
WEIGHT OF BELT		Kg/m ²	7.98

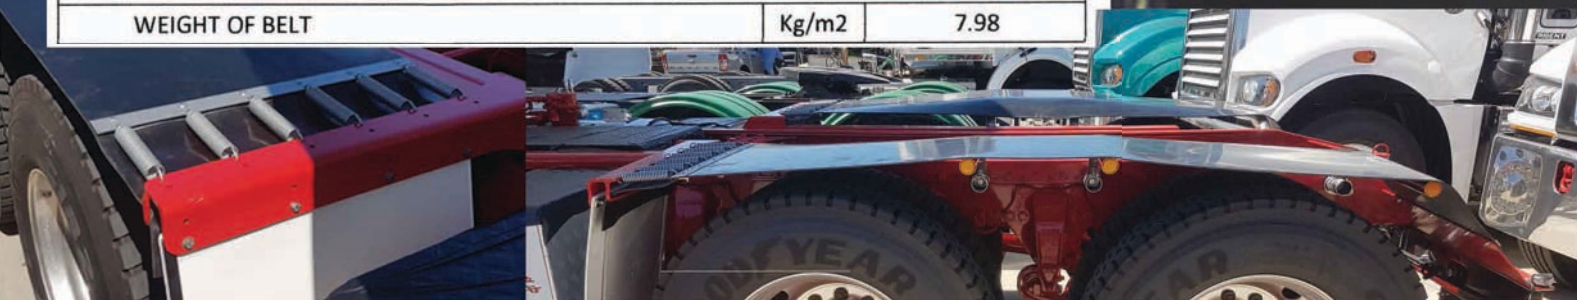

PART NO.	DESCRIPTION	SIZE (MM)	COLOR	TYPE
SRCONV6X670MMEP200	CONV RUBBER 6MM X 670MM 2 PLY	6MM 2 PLY	BLACK	NR/SBR



I.R.S.
Build With Quality

RUBBER
HARDWARE
TAPES
SEALANTS

1300 767 567

www.indrub.com.au